



## AIR SUPPLY K160

The K160 can pump up to 160l of air per minute into the tires. Operating without oil, the AIR SUPPLY system can be mounted anywhere and is designed for vehicles without a pneumatic brake system.

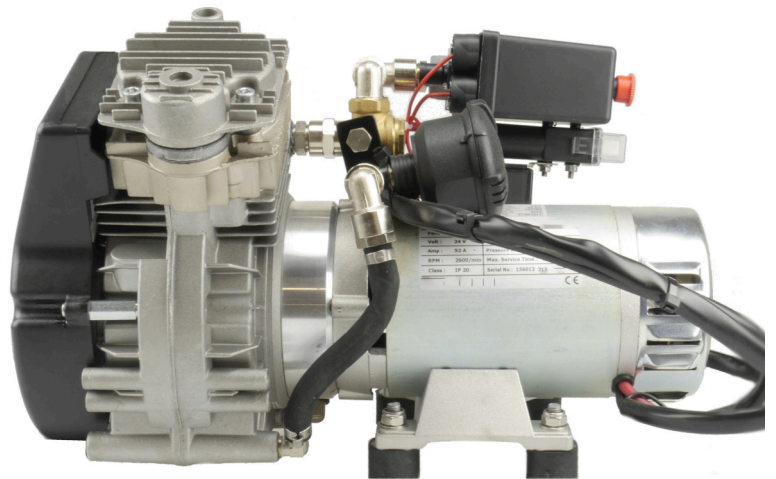

- 12V | 24V- 2 cyl. v-compressor
- Effective air flow: 160 litres/min at 1 bar back pressure
- Power consumption: 85 Amp | 52 Amp
- Oil-free
- Ready for connection
- Max. power-on time: 20 min. followed by 20 min. re-cooling
- Dimensions: 39 cm | 25 cm | 27 cm (width | height | length)
- Weight: 15 kg
- IP20 rating
- Revolution: 2,600 RPM
- Operating volume: 80 dB
- Phase: CC

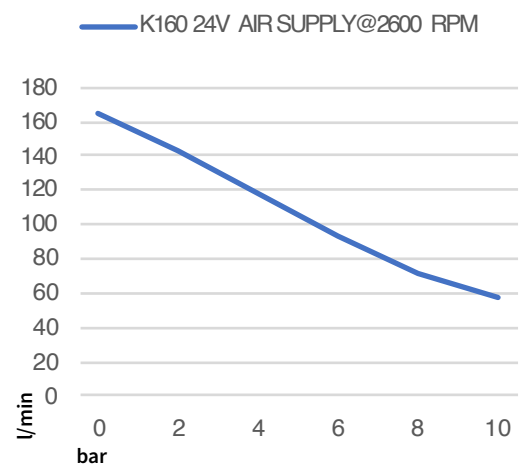

### ti.systems GmbH

Welslerstraße 1

41468 Neuss | Germany

tel +49 2131. 153 18-0

mail info@ti.systems

Certified to DIN EN ISO 9001:2015

DIN EN ISO 14001:2015

[www.ti.systems](http://www.ti.systems)

**ti.systems**

tire inflation systems

made in Germany